

2,500LTR CORRUGATED INDUSTRIAL TANK

INSTALLATION:

TANKS ARE TO BE INSTALLED ON A WELL COMPACTED, LEVELLED EARTH PAD, FREE FROM SHARP OR LOCALISED HARD STONES/OBJECTS THAT COULD DAMAGE THE TANK BASE. THE ROOF OF THIS TANK IS INTENDED ONLY TO COVER AND IS NOT TO BE TRAFFICABLE ROOF.

MATERIAL:

LLDPE MATERIAL DESIGNED SPECIFICALLY FOR ROTATIONAL MOULDING APPLICATIONS DELIVERING A HIGH ESCR, CHEMICAL RESISTANCE, STIFFNESS AND TOUGHNESS WHICH IS UV STABILISED TO PROVIDE PROLONGED OUTDOOR PROTECTION IN HARSH AUSTRALIAN CONDITIONS.

STANDARDS:

ALL TANKS BY COERCO ARE MANUFACTURED IN GUIDANCE WITH AUST STANDARD AS:4766 AND ARE STRUCTURALLY ENGINEERED TO CONFORM TO CYCLONIC AREAS AND STRESS ANALYSIS TESTING REQUIREMENTS.


DIMENSIONS:

DIMENSIONS MAY VARY SLIGHTLY DUE TO THE SHRINKAGE NATURE OF POLYETHYLENE.


NOTE: THIS DRAWING DETAILS COERCO'S STANDARD INDUSTRIAL TANK. ADDITIONAL FITTINGS & ACCESSORIES AVAILABLE.




SPECIFIC GRAVITY TANK WEIGHTS	
SG 1.2	90kg
SG 1.3	97kg
SG 1.5	113kg

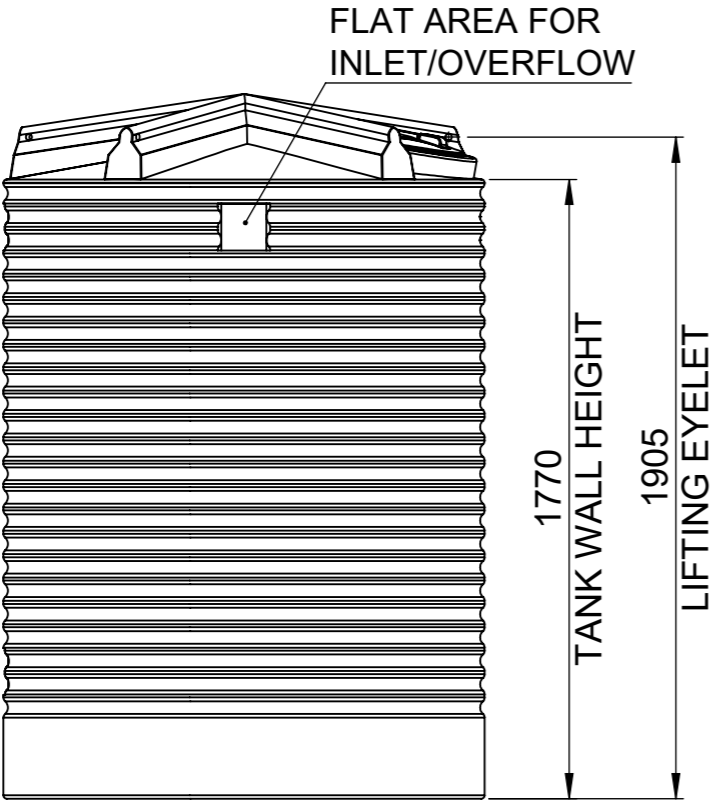


3 O'CLOCK VIEW

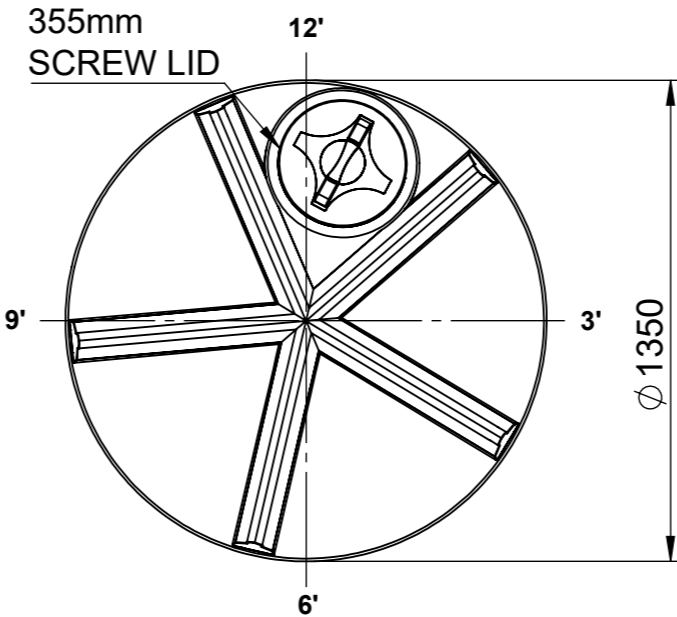


TOP VIEW

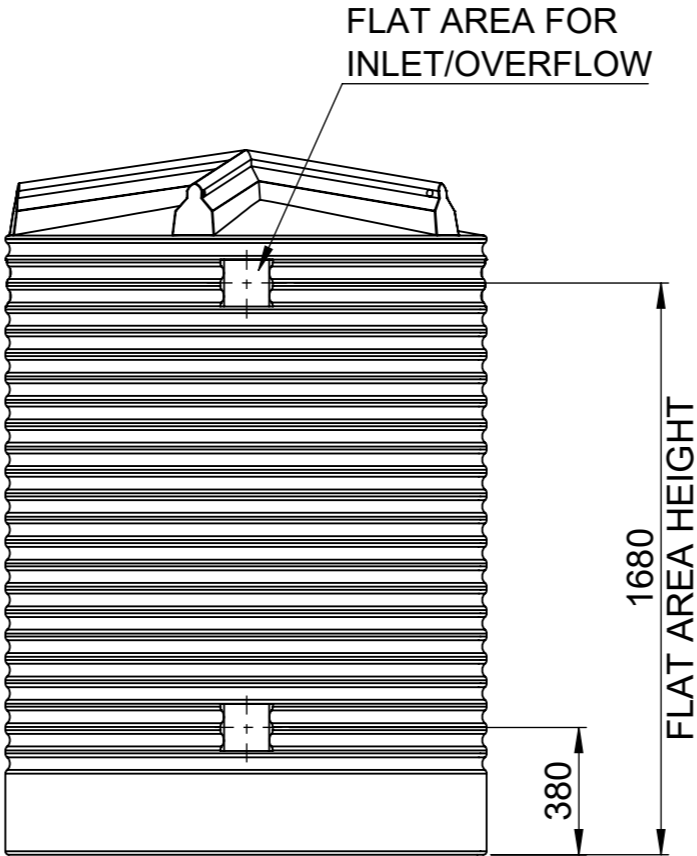

6 O'CLOCK VIEW

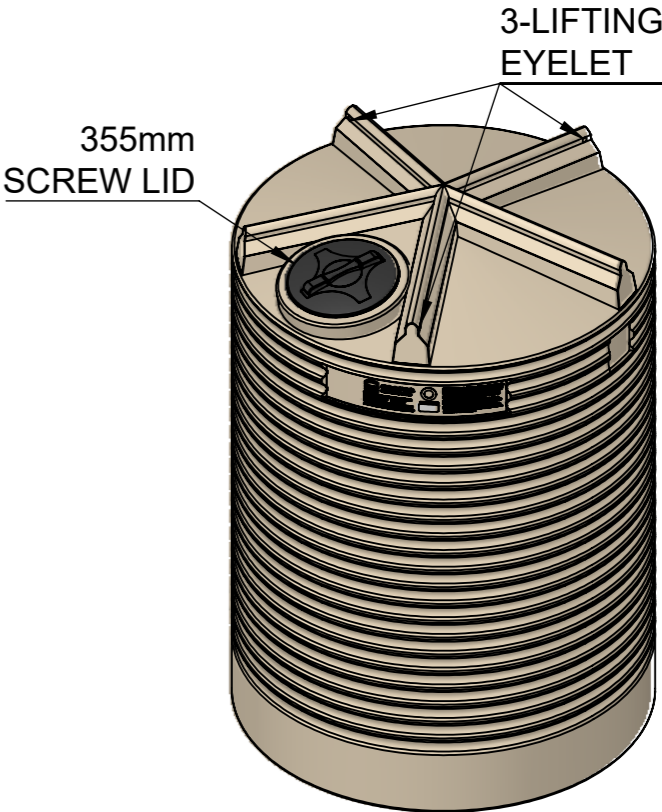

ISOMETRIC VIEW

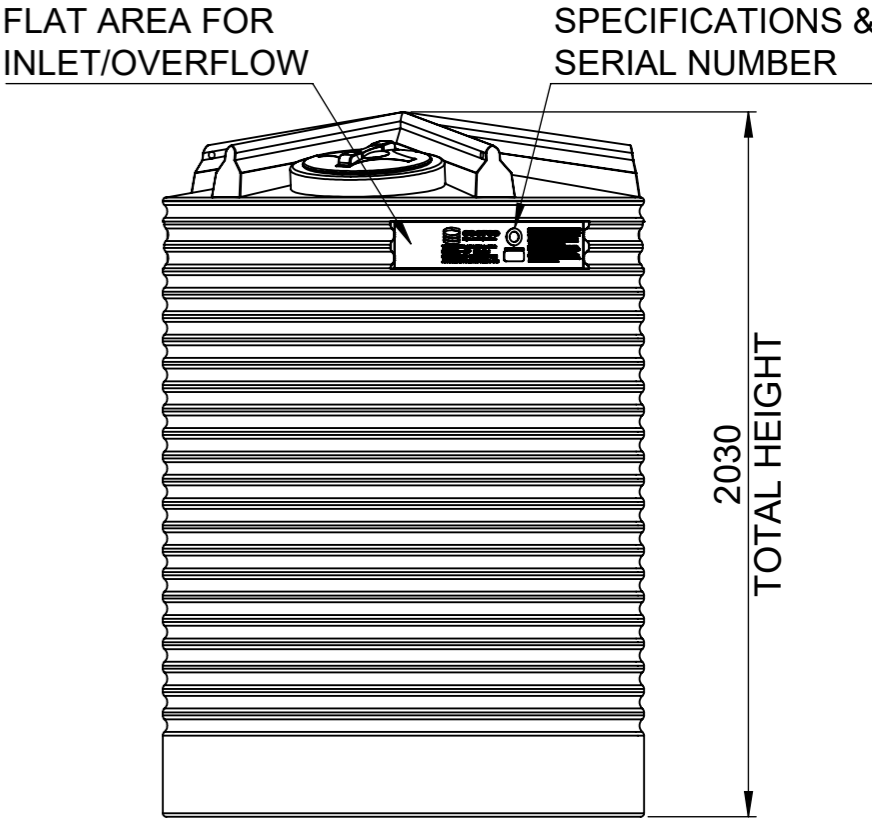

12 O'CLOCK VIEW

04	UPDATED TANK HEIGHTS	KD	RB	MJ	18/10/23
03	UPDATED SG TABLE	KD	RB	MJ	13/10/23
02	REMOVED BRASS OUTLET AND OVERFLOW	KD	RB	MJ	18/04/23
REV	DESCRIPTION	DWN	CHK	APP	DATE




coerco  
Engineered Project Solutions

MATERIAL	LOW DENSITY POLYETHYLENE	DWN	KD
COLOUR/ FINISH	POLISHED	CHK	RB
S.G.		APP	MJ
		SCALE: NTS	

STOCK CODE	IT2500		
PRODUCT	2,500LTR CORRUGATED INDUSTRIAL TANK		
SHEET 1 OF 1	DWG NO.	IT2500_GA_001	REV. 04

PROPRIETARY. Neither this document nor its contents may be used or reproduced in any manner without the written authorisation of COERCO Unless otherwise noted all dimensions are in millimetres



A3

COERCO  
23 Harris Rd, Malaga Western Australia 6090

Phone: 1800 646 277  
E-mail: info@coerco.com.au