

2,500LTR SQUAT CORRUGATED INDUSTRIAL TANK




**INSTALLATION:**  
TANKS ARE TO BE INSTALLED ON A WELL COMPACTED, LEVELLED EARTH PAD, FREE FROM SHARP OR LOCALISED HARD STONES/OBJECTS THAT COULD DAMAGE THE TANK BASE. THE ROOF OF THIS TANK IS INTENDED ONLY TO COVER AND IS NOT TO BE TRAFFICABLE ROOF.

**MATERIAL:**  
LLDPE MATERIAL DESIGNED SPECIFICALLY FOR ROTATIONAL MOULDING APPLICATIONS DELIVERING A HIGH ESCR, CHEMICAL RESISTANCE, STIFFNESS AND TOUGHNESS WHICH IS UV STABILISED TO PROVIDE PROLONGED OUTDOOR PROTECTION IN HARSH AUSTRALIAN CONDITIONS.


**STANDARDS:**  
ALL TANKS BY COERCO ARE MANUFACTURED IN GUIDANCE WITH AUST STANDARD AS:4766 AND ARE STRUCTURALLY ENGINEERED TO CONFORM TO CYCLONIC AREAS AND STRESS ANALYSIS TESTING REQUIREMENTS.

**DIMENSIONS:**  
DIMENSIONS MAY VARY SLIGHTLY DUE TO THE SHRINKAGE NATURE OF POLYETHYLENE.


**NOTE:** THIS DRAWING DETAILS COERCO'S **STANDARD** INDUSTRIAL TANK. ADDITIONAL FITTINGS & ACCESSORIES AVAILABLE.

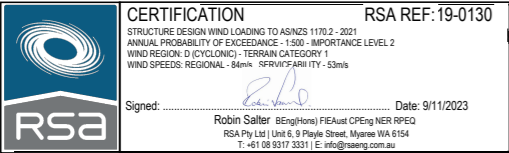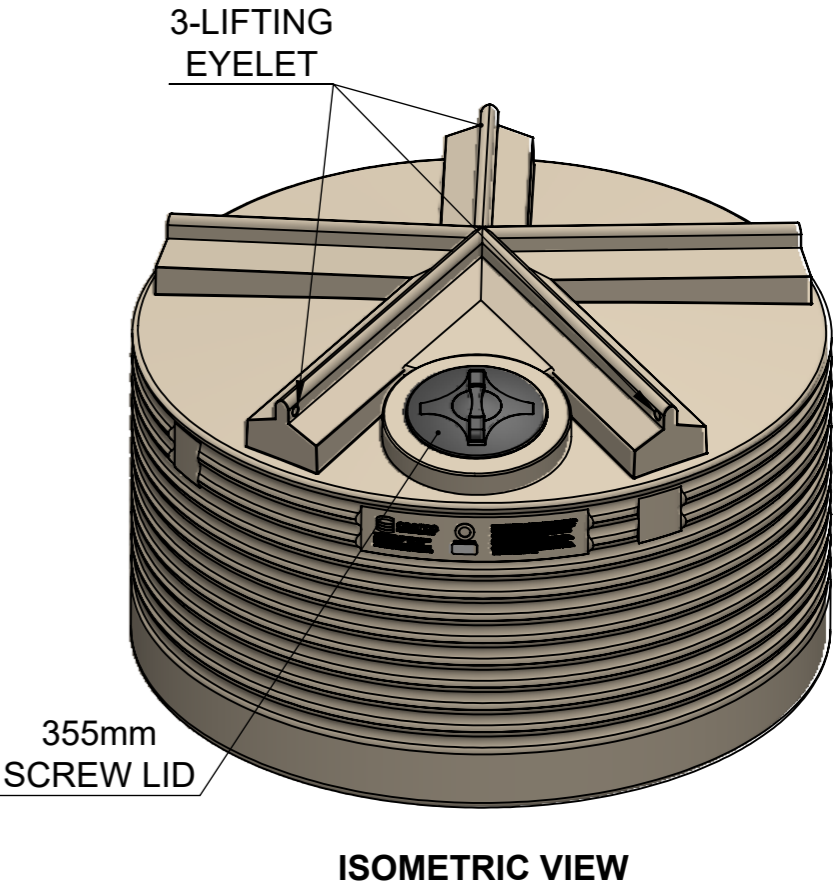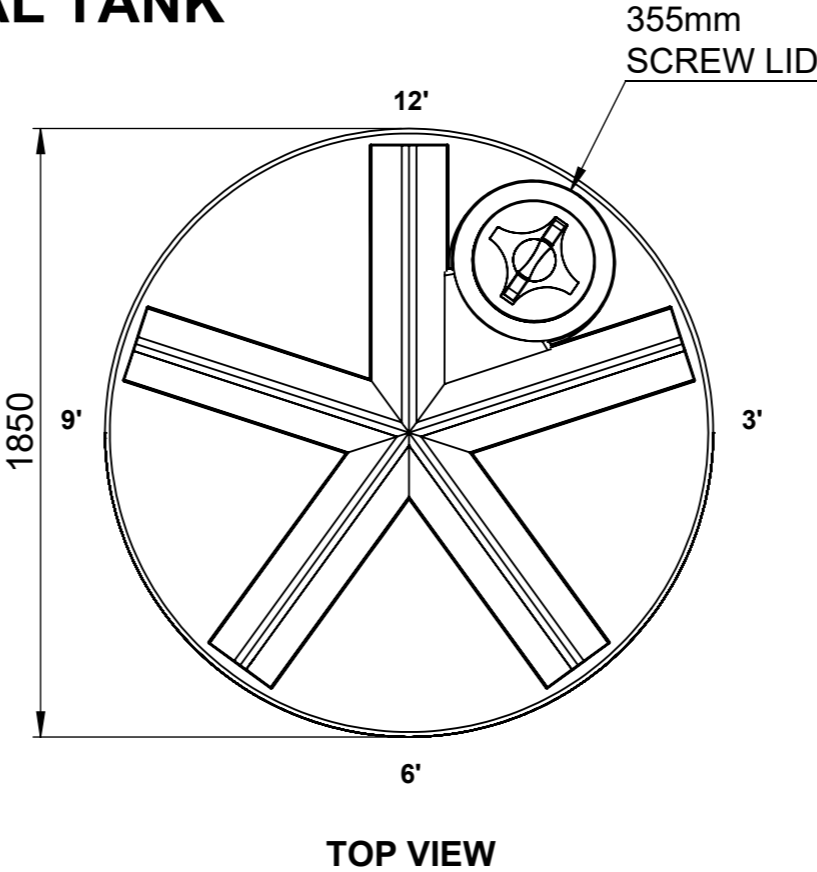

FLAT AREA FOR  
INLET/OVERFLOW

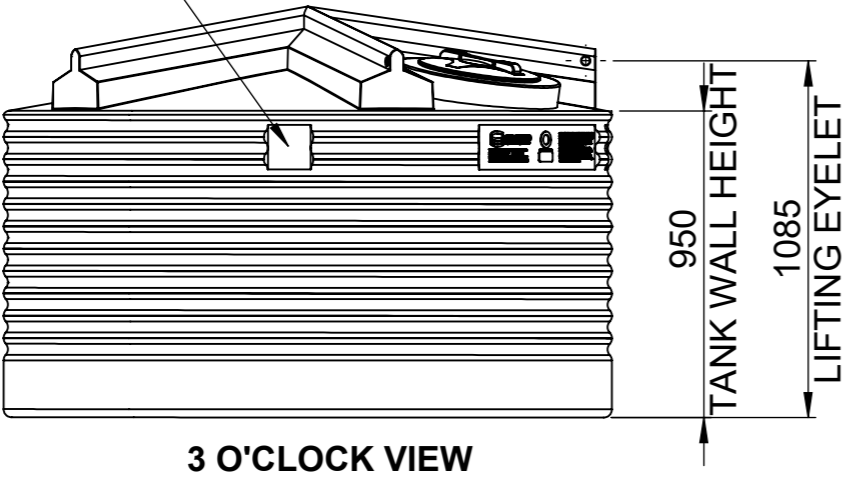


FLAT AREA FOR  
INLET/OVERFLOW

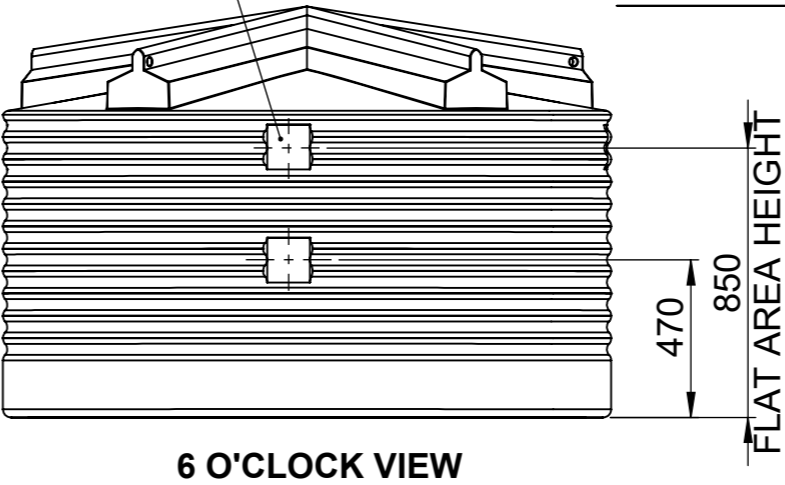

SPECIFICATIONS &  
SERIAL NUMBER

FLAT AREA FOR  
INLET/OVERFLOW

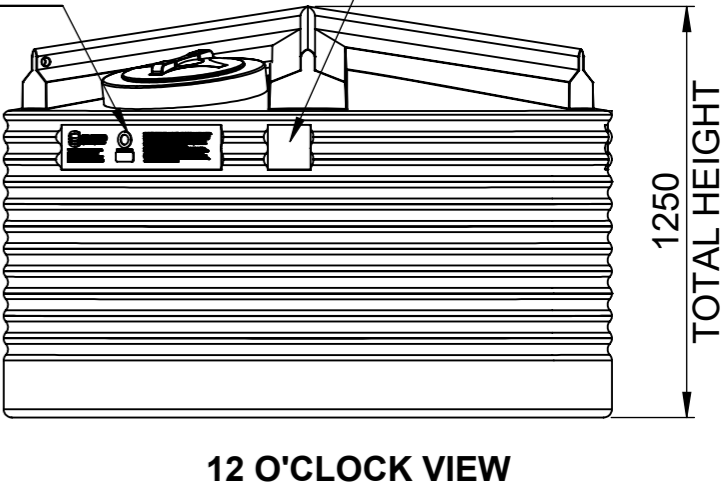

SPECIFIC GRAVITY TANK WEIGHTS	
SG 1.2	90kg
SG 1.3	97kg
SG 1.5	113kg


03	UPDATED SG TABLE	KD	RB	MJ	13/10/23
02	REMOVED BRASS OUTLET AND OVERFLOW	KD	RB	MJ	18/04/23
01	REPLACED 455mm SCREW LID TO 355mm	LB			07/09/22
REV	DESCRIPTION	DWN	CHK	APP	DATE



MATERIAL	LOW DENSITY POLYETHYLENE	DWN	KD
COLOUR/ FINISH	POLISHED	CHK	RB
S.G.		APP	MJ
		SCALE: NTS	

STOCK CODE	IT2500S
PRODUCT	2,500LTR SQUAT CORRUGATED INDUSTRIAL TANK
SHEET 1 OF 1	DWG NO. IT2500S_GA_001
REV.	03

PROPRIETARY. Neither this document nor its contents may be used or reproduced in any manner without the written authorisation of COERCO. Unless otherwise noted all dimensions are in millimetres.



COERCO  
23 Harris Rd, Malaga Western Australia 6090

Phone: 1800 646 277  
E-mail: info@coerco.com.au