

4,500LTR CORRUGATED INDUSTRIAL TANK



INSTALLATION:
TANKS ARE TO BE INSTALLED ON A WELL COMPACTED, LEVELLED EARTH PAD, FREE FROM SHARP OR LOCALISED HARD STONES/OBJECTS THAT COULD DAMAGE THE TANK BASE. THE ROOF OF THIS TANK IS INTENDED ONLY TO COVER AND IS NOT TO BE TRAFFICABLE ROOF.

MATERIAL:
LLDPE MATERIAL DESIGNED SPECIFICALLY FOR ROTATIONAL MOULDING APPLICATIONS DELIVERING A HIGH ESCR, CHEMICAL RESISTANCE, STIFFNESS AND TOUGHNESS WHICH IS UV STABILISED TO PROVIDE PROLONGED OUTDOOR PROTECTION IN HARSH AUSTRALIAN CONDITIONS.


STANDARDS:
ALL TANKS BY COERCO ARE MANUFACTURED IN GUIDANCE WITH AUST STANDARD AS:4766 AND ARE STRUCTURALLY ENGINEERED TO CONFORM TO CYCLONIC AREAS AND STRESS ANALYSIS TESTING REQUIREMENTS.

DIMENSIONS:
DIMENSIONS MAY VARY SLIGHTLY DUE TO THE SHRINKAGE NATURE OF POLYETHYLENE.

NOTE: THIS DRAWING DETAILS COERCO'S **STANDARD** INDUSTRIAL TANK. ADDITIONAL FITTINGS & ACCESSORIES AVAILABLE.

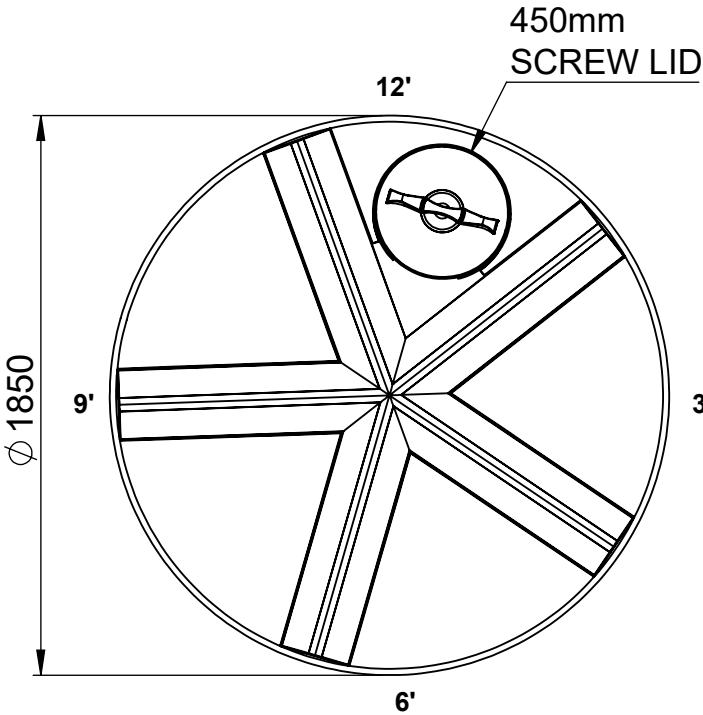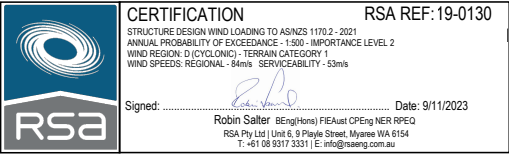


TOP VIEW

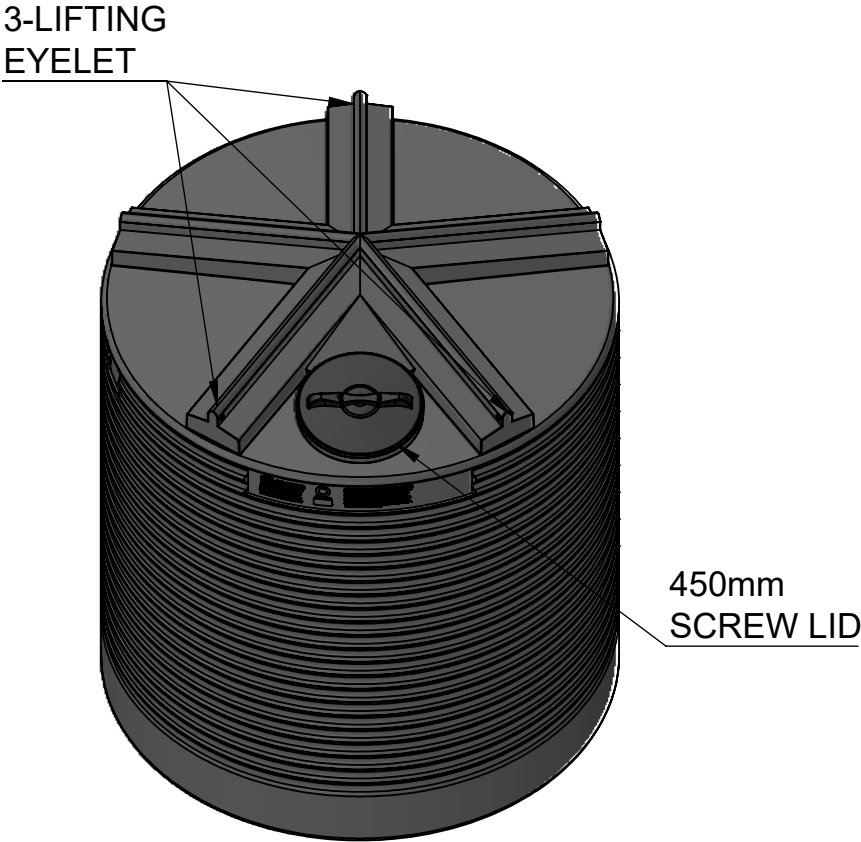


ISOMETRIC VIEW

FLAT AREA FOR INLET/OVERFLOW

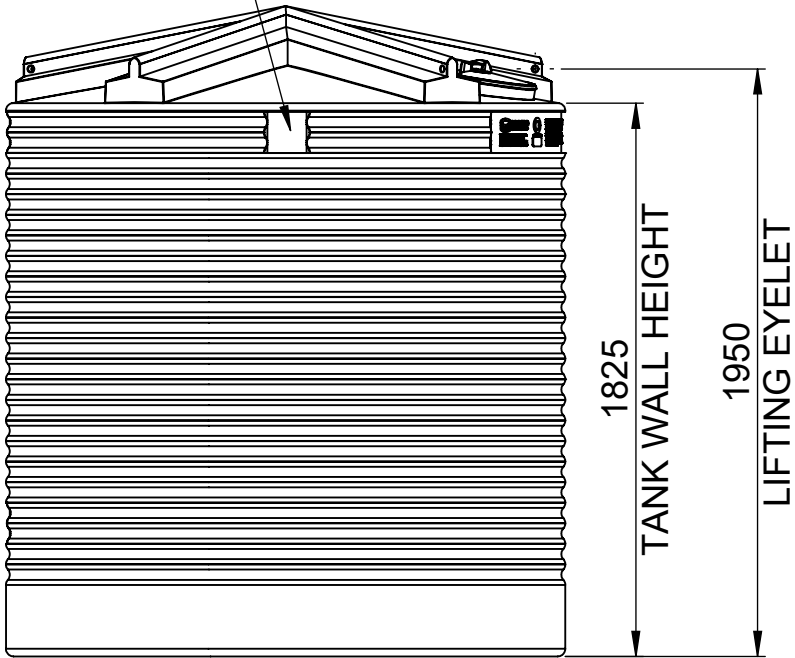

3 O'CLOCK VIEW


FLAT AREA FOR INLET/OVERFLOW

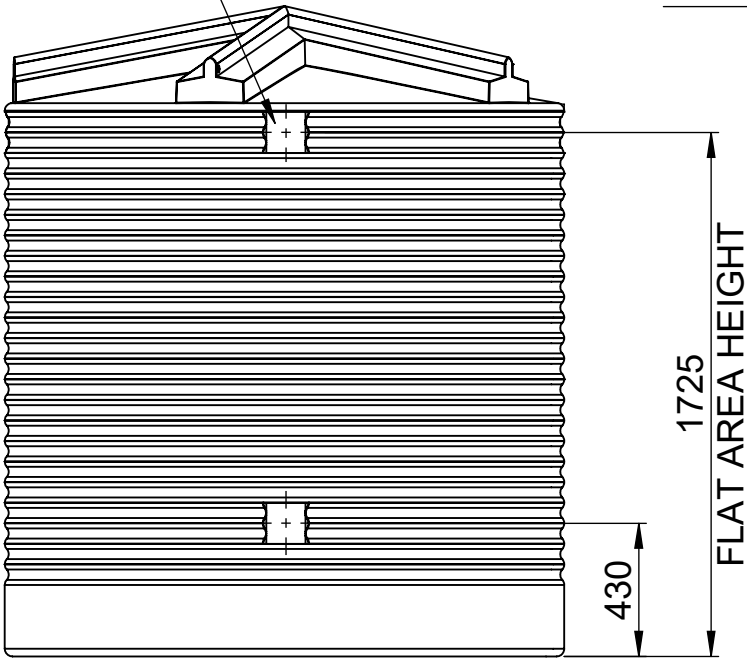

6 O'CLOCK VIEW

SPECIFICATIONS & SERIAL NUMBER

FLAT AREA FOR INLET/OVERFLOW

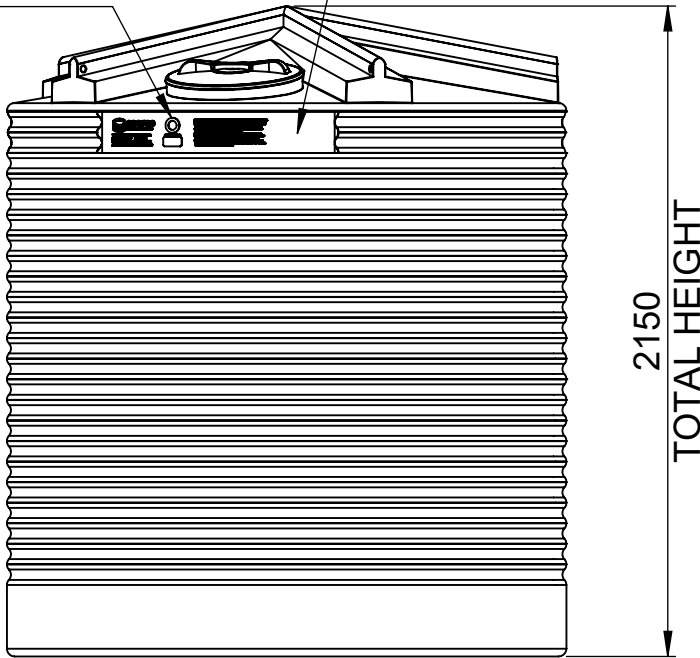

12 O'CLOCK VIEW

SPECIFIC GRAVITY TANK WEIGHTS	
SG 1.2	120kg
SG 1.3	130kg
SG 1.5	150kg

02	UPDATED SG TABLE	KD	RB	MJ	20/04/23
01	UPDATE DRAWING NUMBER	KD	RB	MJ	20/04/23
00	ORIGINAL CAD DRAWING ISSUED	GT			27/06/19
REV	DESCRIPTION	DWN	CHK	APP	DATE



Engineered Project Solutions

MATERIAL	LOW DENSITY POLYETHYLENE	DWN	KD
COLOUR/ FINISH	POLISHED	CHK	RB
S.G.		APP	MJ
		SCALE: NTS	

STOCK CODE	IT4500		
PRODUCT	4,500LTR CORRUGATED INDUSTRIAL TANK		
SHEET 1 OF 1	DWG NO.	IT4500_GA_001	REV. 02