

Floating Walkway



OVERVIEW

Coerco Floating Walkway is designed and engineered for safely accessing pontoons or platforms and/or equipment in open bodies of water.

FEATURES

- Manufactured from durable, lightweight, UV stabilised polyethylene
- Chemical resistant
- Anti-slip
- Optional bolt on walkway cleats to comply with AS1657-2003 clause 5.3.3 < 18 degrees
- Hi-visibility handrails to comply with AS1657
- Modular Construction (Flat packed for transport)



Engineered Project Solutions

Floating Walkway



SPECIFICATIONS

Specification Summary

Supply and install of Coerco Floating Walkway is as per manufacturer Coerco Pty Ltd recommendations.

System Applications

Coerco Floating Walkway is designed and engineered for safely accessing pontoons or platforms and/or equipment in open bodies of water.

Materials

Coerco Floating Walkway is manufactured from high quality, impact and chemical resistant low-density polyethylene certified to AS/NZS 4020:2002 and AS2070 Part 1.

Galvanizing process in accordance with AS/NZS 4680, AS/NZS 4791 and AS/NZS 4792

Fixings are in accordance with Australian Standard AS 1110.1.

WARRANTY

Warranty

Coerco Pump Pontoons are manufactured to the highest quality standards using Australian Made Materials. Coerco Floating Walkway is covered by manufacture's warranty. Please refer to Section 1.22 in the Coerco Warranty Conditions for more information

Inspection & Maintenance

Coerco recommends visual inspection for any damage or loose fixings is recommended periodically and prior to use.

Maintenance should be carried out by competent personnel. Basic wear and tear preventative maintenance is recommended.

COMPLIANCE

Compliance


Coerco Floating Walkway is manufactured in accordance with Australian Standards where applicable.

AS/NZS 4020:2002	As standard Coerco
AS2070 Part 1	Floating Walkway complies
AS/NZS 4680	up to 10 degrees. Optional
AS/NZS 4791	bolt on cleat panels
AS/NZS 4792	available to comply with
AS 1110.1	AS 1657-2003 clause
	5.3.3 >18 degrees.

Important Note

Failure to supply and/or install product in accordance with above specification and installation/usage guidelines voids to complete system certification and/or warranty.

Floating Walkway

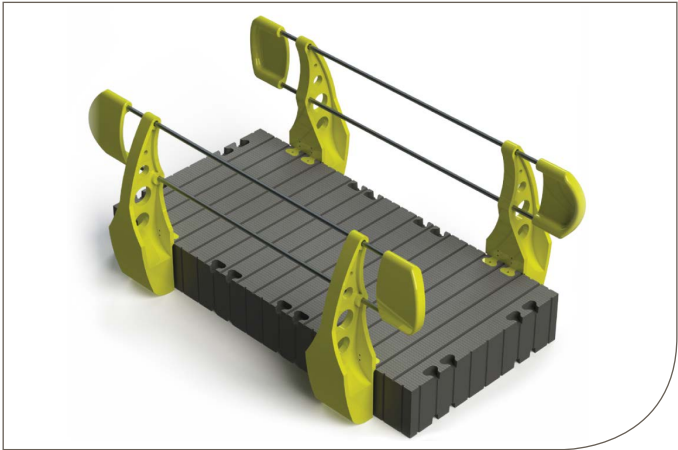

Features

- Manufactured from durable, lightweight, UV stabilised polyethylene
- Chemical resistant
- Anti-slip
- Optional bolt on walkway cleats to comply with AS1657-2003 clause 5.3.3 <18 degrees
- Hi-visibility handrails to comply with AS1657
- Modular construction (Flat packed for transport)

Floating Walkway

Code	Description
WLK-3015	Floating poly walkway (3000 x 1500mm)

Gangways



OVERVIEW

Coerco Gangways are designed and engineered for safely accessing pontoons or platforms and/or equipment in open bodies of water where the bank incline is > 18 degrees.

FEATURES

- Manufactured from aluminum, galvanised or stainless steel
- Range of flooring and grating options
- Optional protective coatings
- Custom fabricate to suit your requirements
- Manufactured in accordance with AS 1657



Engineered Project Solutions

SPECIFICATIONS

Specification Summary

Supply and install of Coerco Gangways are as per manufacturer Coerco Pty Ltd recommendations.

System Applications

Coerco Gangways are designed and engineered for safely accessing pontoons or platforms and/or equipment in open bodies of water where the bank incline is >18 degrees.

Materials

Coerco Gangways are manufactured from aluminum, galvanised or stainless steel.

Galvanizing process in accordance with AS/NZS 4680, AS/NZS 4791 and AS/NZS 4792

Fixings are in accordance with Australian Standard AS 1110.1.

WARRANTY

Warranty

Coerco Gangways are manufactured to the highest quality standards using Australian Made Materials. Our Gangways are covered by manufacturer's warranty. Please refer to Section 1.22 in the Coerco Warranty Conditions for more information.

Inspection & Maintenance

Coerco recommends visual inspection for any damage or loose fixings is recommended periodically and prior to use.

Maintenance should be carried out by competent personnel. Basic wear and tear preventative maintenance is recommended.

COMPLIANCE

Compliance

Coerco Gangways are manufactured in accordance with Australian Standards where applicable.

AS/NZS 4680

AS/NZS 4791

AS/NZS 4792

AS 1110.1

As standard Coerco Gangway complies with AS 1657-2003

Important Note

Failure to supply and/or install product in accordance with above specification and installation/usage guidelines voids to complete system certification and/or warranty.

Gangways



Features

- Manufactured from aluminium, galvanized or stainless steel
- Range of flooring and grating options
- Optional protective coatings available
- Custom fabricate to suit your requirements
- Manufactured in accordance with AS 1657



Engineered Project Solutions